

コーナー方立

フェイスングフロント (SG)

単板ガラス

70mm 枠 100mm 枠

ガラス溝幅 18mm

■ 性能仕様


耐風圧性	S-1	800Pa
	S-2	1200Pa
	S-3	1600Pa

RC 枠・ALC 枠


S = 1/5

出隅


① 70mm 枠



② 100mm 枠




③ スリム型 (RC 枠のみ設定)




入隅


④ 70mm 枠



⑤ 100mm 枠




⑥ スリム型 (RC 枠のみ設定)




角形出隅

⑦ 70mm 枠




⑧ 100mm 枠




角形入隅

⑨ 70mm 枠




⑩ 100mm 枠




■ 方立強度制限表

S-1 | 800Pa

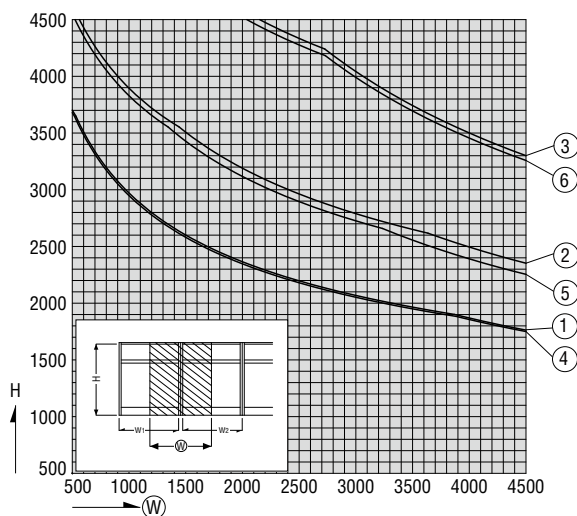


■ 方立強度制限表 (角形)


S-1 | 800Pa

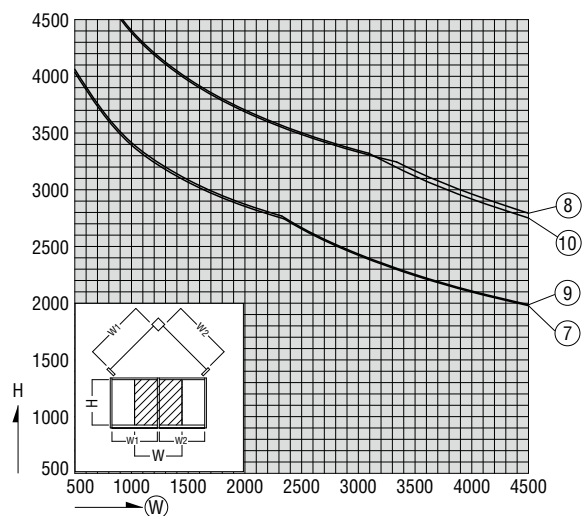


S-2 | 1200Pa

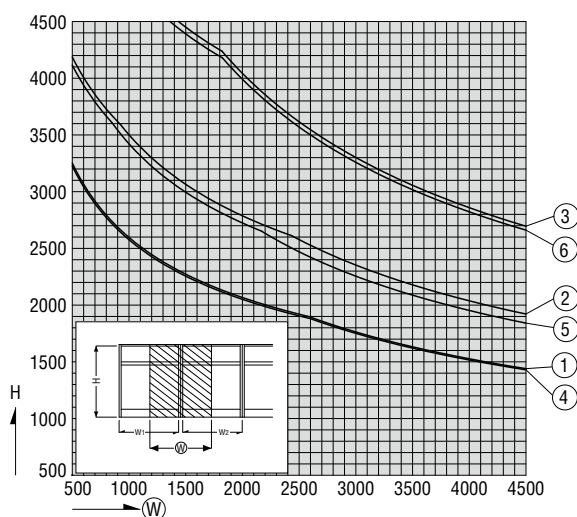

S-2 | 1200Pa

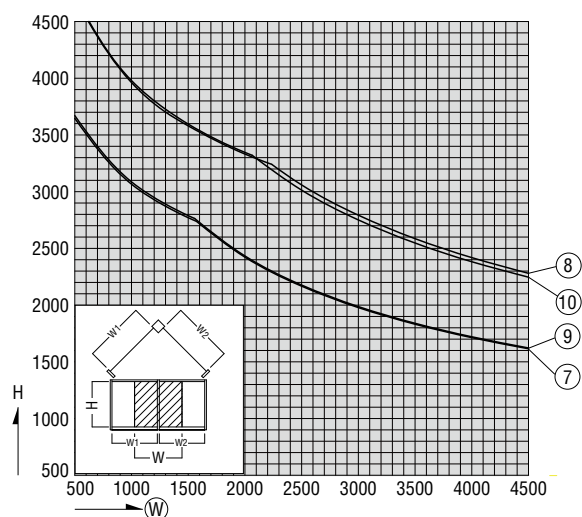

S-3 | 1600Pa

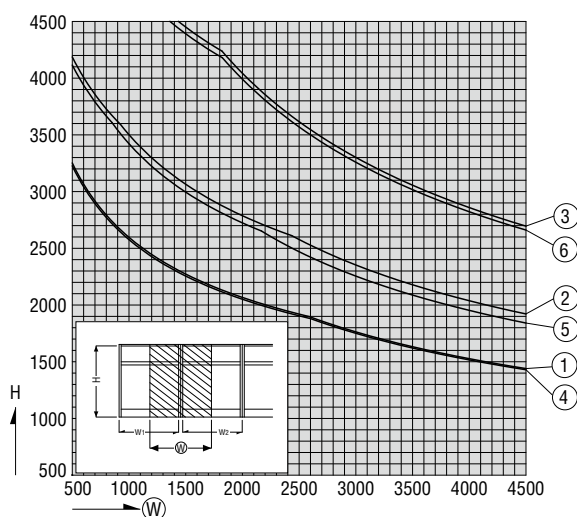

S-3 | 1600Pa

