

コーナー方立

フェイスングフロント (SG)

単板ガラス

100mm 枠

ガラス溝幅 18mm



■ 性能仕様

耐風圧性	S-2	1200Pa
	S-3	1600Pa
	S-4	2000Pa
	S-5	2400Pa



RC 枠・ALC 枠

A 角形方立 (100mm 見込)

S = 1/5

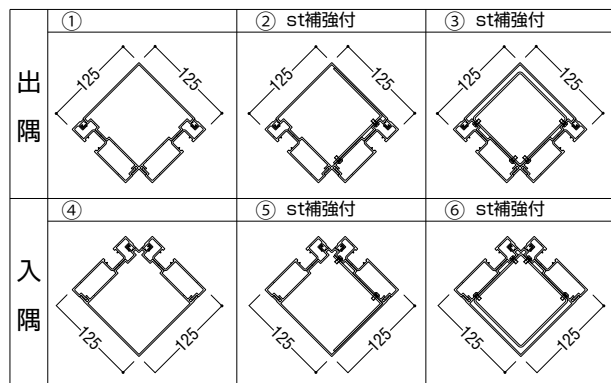

B 三方(四方)溝方立


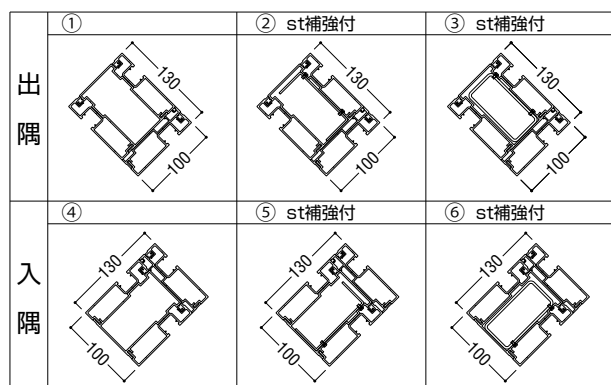


■ 方立強度制限表

S-2 | 1200Pa


A 角形方立 (100mm 見込)

B 三方(四方)溝方立

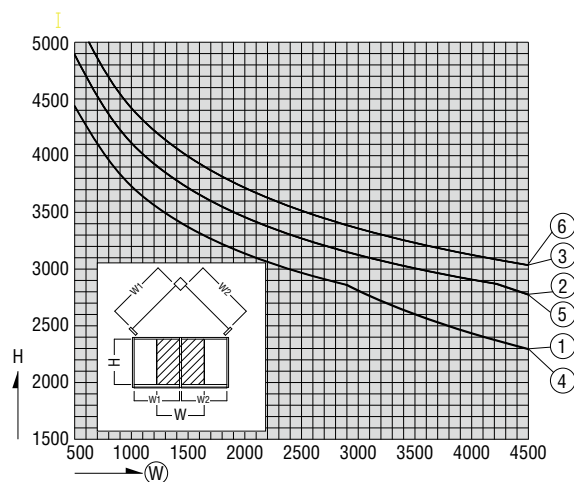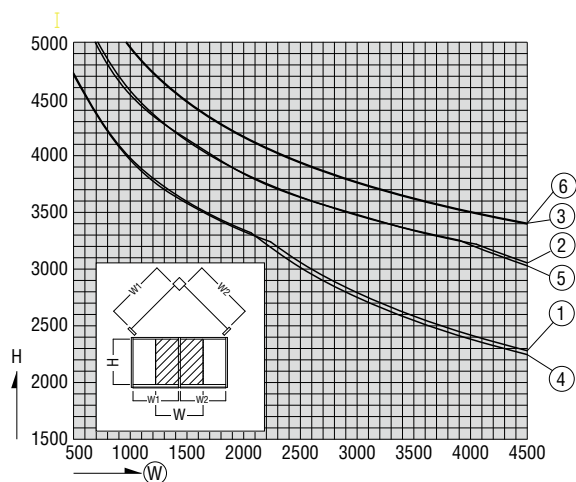


S-3 | 1600Pa


A 角形方立 (100mm 見込)

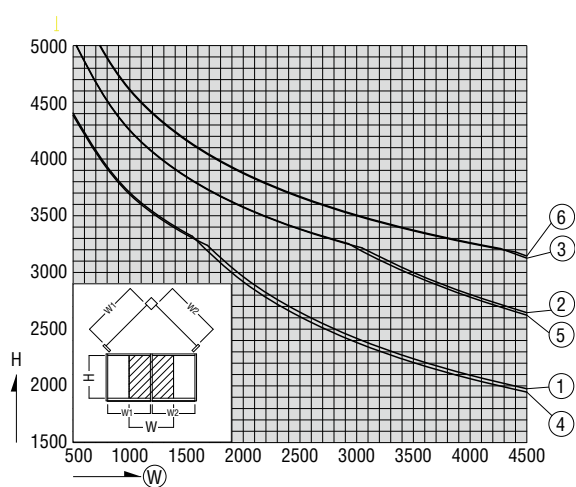


B 三方 (四方) 溝方立

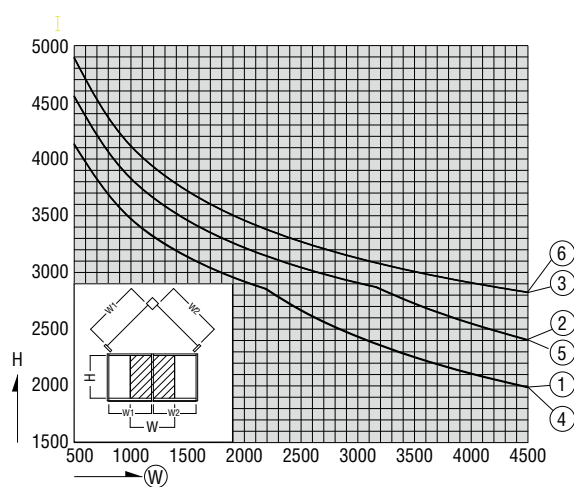**S-4 | 2000Pa**


A 角形方立 (100mm 見込)

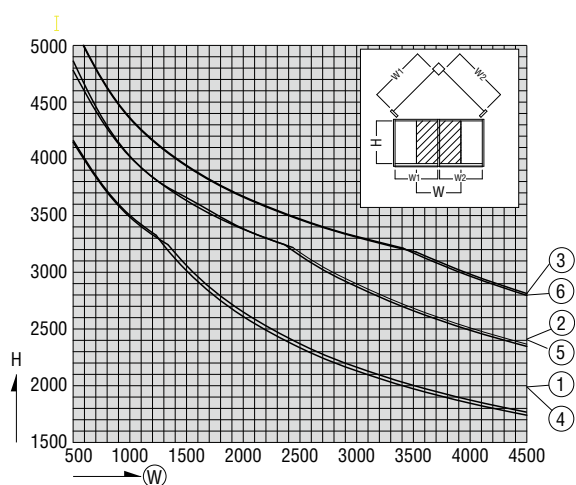

B 三方 (四方) 溝方立

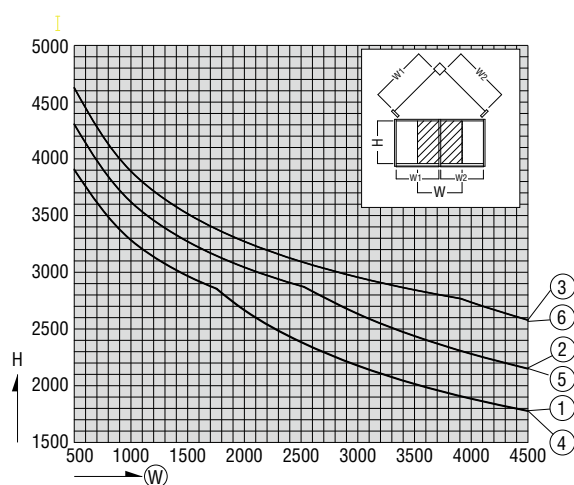**S-5 | 2400Pa**

A 角形方立 (100mm 見込)

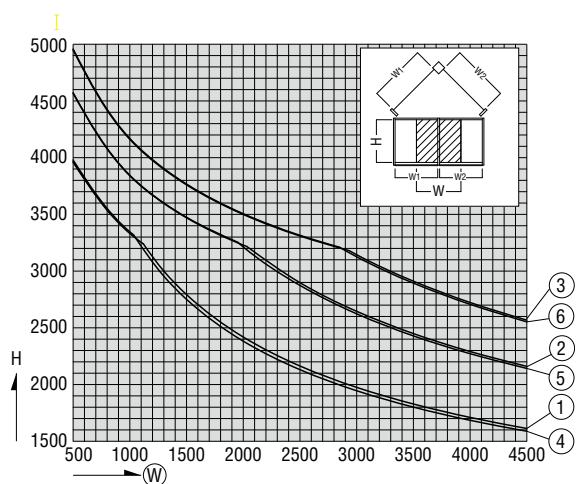

B 三方 (四方) 溝方立

